




**Standard Terminal Dimensions**  
(Optional terminal please check terminal information page)

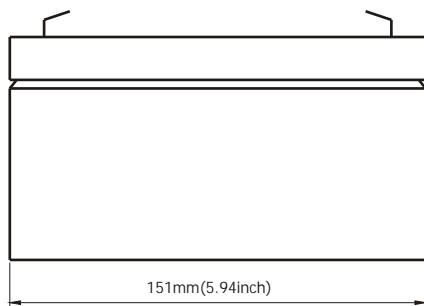

### GT-C RANGE

Gaston GT-C Range (deep cycle) battery is specially designed to have a large amount of stored current discharged between charging sessions, with heavy non-porous battery plate that is used a different chemistry for the plates active paste material, and a slightly stronger electrolyte than normal battery electrolyte. It enhance a superior performance of high power output and excellent deep cycle life for energy applications.

### Application

- Electric Powered Vehicles
- Golf Cars and Buggies
- Wheel Chairs
- Power Tools
- Electric Powered Toys
- Control System
- Vacuum Cleaners
- Medical Equipments
- UPS
- PVs





### General Features

- Better discharge characteristics than normal VRLA batteries.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- Higher safety & reliable construction.
- Extra durability and deep cycle ability for heavy demand applications.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

### Construction

- Component .....Raw material
- Positive .....Lead dioxide
- Negative .....Lead
- Container .....ABS
- Cover .....ABS
- Sealant .....Epoxy Resin
- Safety valve .....EPDR
- Terminal .....Copper
- Separator .....Fiber glass
- Electrolyte .....Sulfuric acid

Battery Model	GT6-7C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity(25°C)	20HR(0.4A,1.75V)	10HR(0.72A,1.75V)	5HR(1.20A,1.75V)	1HR(4.60A,1.75V)
	8AH	7.2AH	6AH	4.6AH
Dimensions	Length	Width	Height	Total Height
	151mm(5.94inch)	34mm(1.34inch)	94mm(3.70inch)	100mm(3.94inch)
Approx. Weight	1.36Kg (3.001 lbs)			
Internal Resistance	Full charged at 25°C: 0.014 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/ °C), max. Current: 2.1A		6.8-6.9V(-10mV/ °C)	

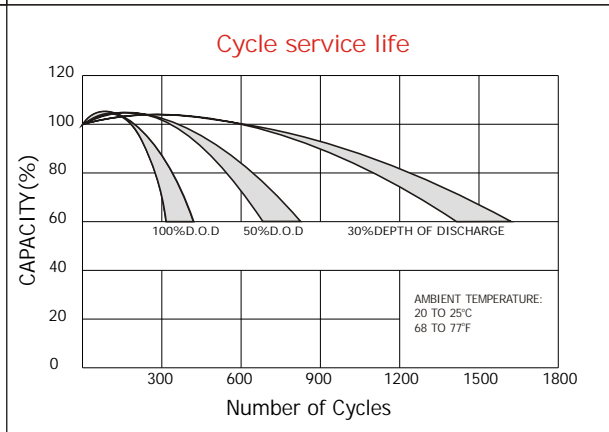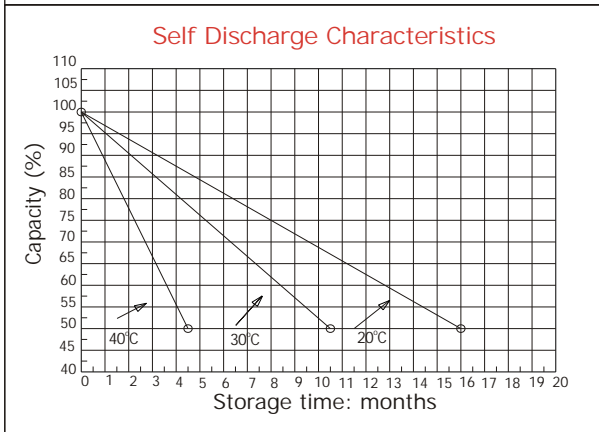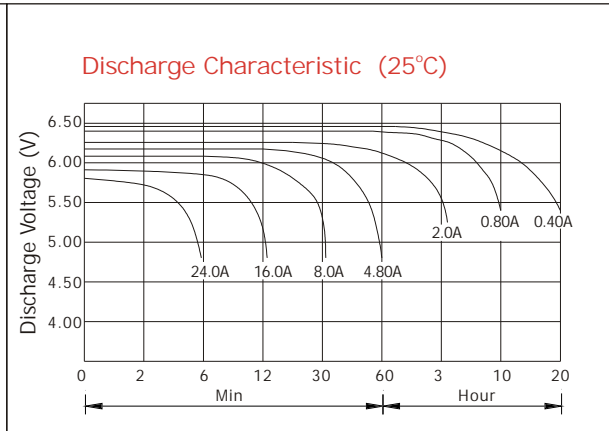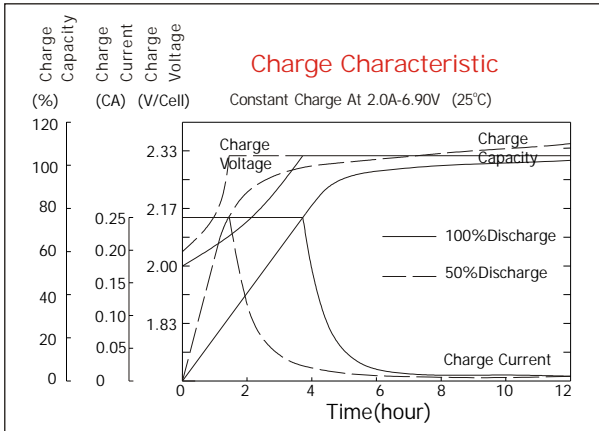

### Constant current discharge ratings-amperes at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	39.0	24.3	18.3	11.2	5.69	2.50	1.53	0.83	0.45
1.67V	36.6	23.0	17.6	10.7	5.61	2.40	1.49	0.82	0.43
1.70V	33.5	22.2	17.2	9.71	5.44	2.24	1.46	0.82	0.43
1.75V	32.9	21.5	16.6	9.22	5.18	2.17	1.43	0.82	0.42
1.80V	29.4	20.5	15.1	8.54	4.85	2.08	1.34	0.80	0.41
1.85V	26.0	19.6	13.6	7.86	4.52	2.01	1.26	0.79	0.40

### Constant power discharge ratings-watts at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	68.4	43.8	33.4	20.1	10.3	4.43	2.58	1.71	0.90
1.67V	66.0	42.7	33.0	19.7	10.2	4.29	2.57	1.70	0.86
1.70V	62.2	42.3	32.7	18.4	10.0	4.10	2.53	1.69	0.85
1.75V	62.6	42.2	32.4	17.9	9.83	4.00	2.51	1.66	0.83
1.80V	57.2	41.5	30.1	17.1	9.27	3.88	2.43	1.62	0.81
1.85V	51.9	39.4	27.3	16.0	8.71	3.77	2.36	1.58	0.79

